


Für einen entsprechenden normgerechten Unterbau, die fachgerechte Montage der Bodendose (max. Belastung 400kN) sowie entsprechende Drainagerung hat der Kunde zu sorgen.

Customer has to take care of professional foundation and mounting of underfloor distributor systems (max. load capacity 400kN) as well as professional connection to drainage system.

Fondation correspondante aux normes selon la charge admise (max. 400kN) et drainage nécessaire à faire par le client.

Per una corrispondente sottostruttura a norma, la corretta installazione del pozzetto (carico max. 400kN) come anche un drenaggio adeguato è a favore del cliente.

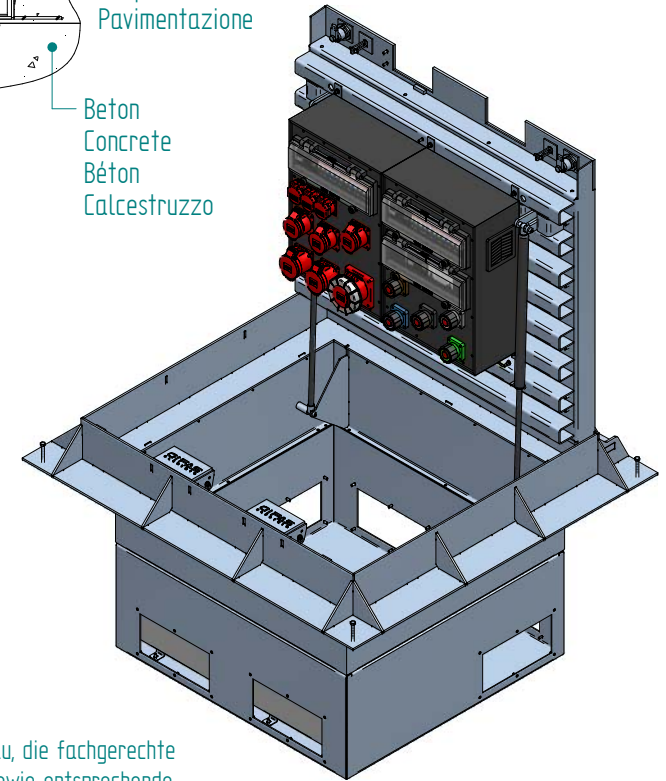

256053 KSV 7900/2 BG Campetto XXL
256058 Poly 4025 BG Anschlussdose
256059 Poly 4025 BG Anschlussdose

A x B x C Aussparungsmasse
Dim. of Recess
Dim. maçonnerie
Dimensioni d'incasso

Ausführung D400 gemäss Manual Campetto
Version D400 according to Campetto manual only
Exécution D400 selon manuel Campetto
Esecuzione D400 come da manuale Campetto

GIFAS
ELECTRIC

GIFAS-ELECTRIC GmbH
Dietrichstrasse 2 - CH-9424 Rheineck
+41 71 886 44 44 info@gifas.ch
+41 71 886 44 44 www.gifas.ch

Unterflurelektrant

Campetto XXL D400 KSV 7900/2

Art.-Nr. : **256060**

19.11.2024

Blatt 1/1
beku